


**Description:**

Low Profile Surface mounted Direct Wall Light, Various colour temperatures, IP54, finished in machined solid Brass (Aged) or 6061 Aluminium (Powder Coated), UV stabilized frosted Acrylic diffuser, pre-fitted 500mm lead, remote 24VDC constant voltage, 'Covert Mounting System'

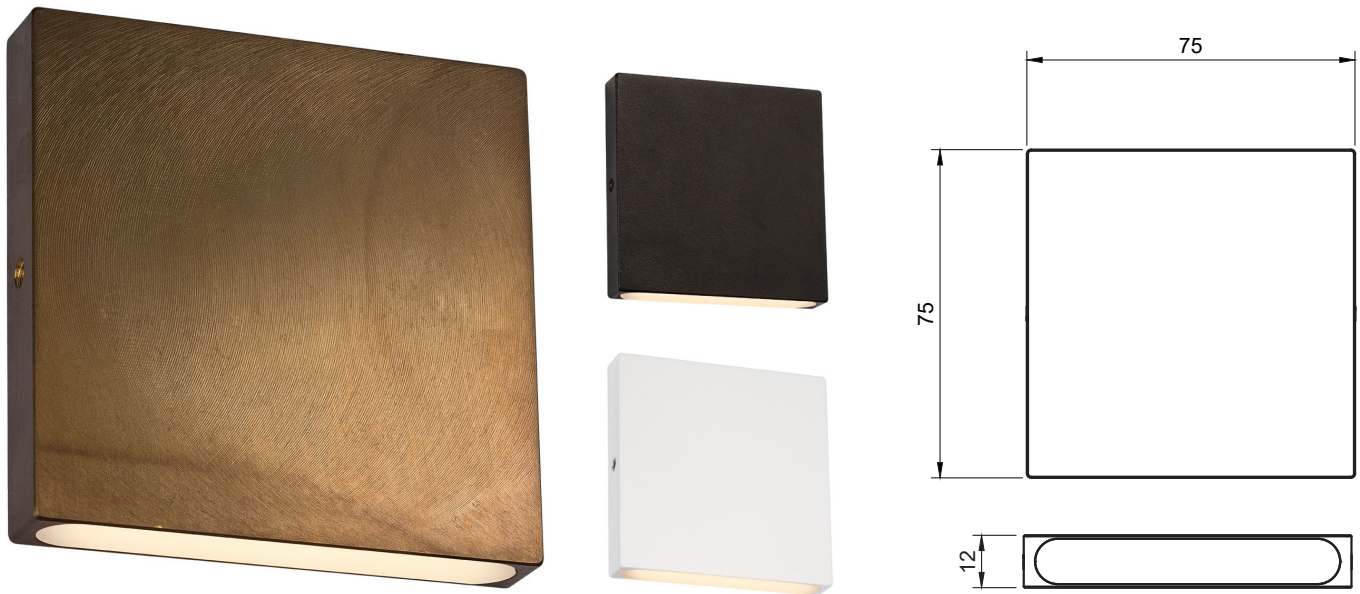

**Technical:**

LED TYPE	COLORS D6240 or CUTTER CLL104	CONTROL GEAR	REMOTE
RATED POWER	1W or 4W	DIMMING PROTOCOL	DALI - 0-10V - PHASE DIM - ON/OFF
CRI	80	CABLE LENGTH	500MM STANDARD LENGTH
BEAM ANGLES	NOMINATED IN TABLE BELOW	MOUNTING OPTIONS	SURFACE
INPUT POWER	24V DC	WEIGHT	0.2KG
NOMINAL LUMENS	38lm or 268lm	HARDWARE	GLASS LENS, O-RING, GLAND, CABLE
IP RATING	IP54	CONSTRUCTION	MACHINED METAL & HEATSINK
COLOUR TEMPERATURE	2700K - 3000K - 4000K	WARRANTY	2 YEARS

**Product Generator:** example 1525-AB-D-30-W-5W-DALI-N/A

Model	Finish	Beam Angle	CCT	Mounting	Wattage	Dimming	Accessory
NL1525	AB Aged Brass	D Diffused	27 2700K	W Wall Mounted	1W / 24V DC	DALI	N/A
	BR Brushed Brass		30 3000K		4W / 24V DC	0-10V	
	PD Black		40 4000K			Phase	
	PW White					On/Off	
	CC Custom						

NL1525	-		-		-		-	
--------	---	--	---	--	---	--	---	--