


**Description:**

Low Profile Surface mounted Direct Wall Light, 1W or 4W, Various CCT, IP54, finished in machined 6061 Aluminum (Powdercoated White, Black or Dark Bronze), UV stabilized frosted Acrylic diffuser, pre-fitted 500mm lead, 24V, 'Covert Mounting System'

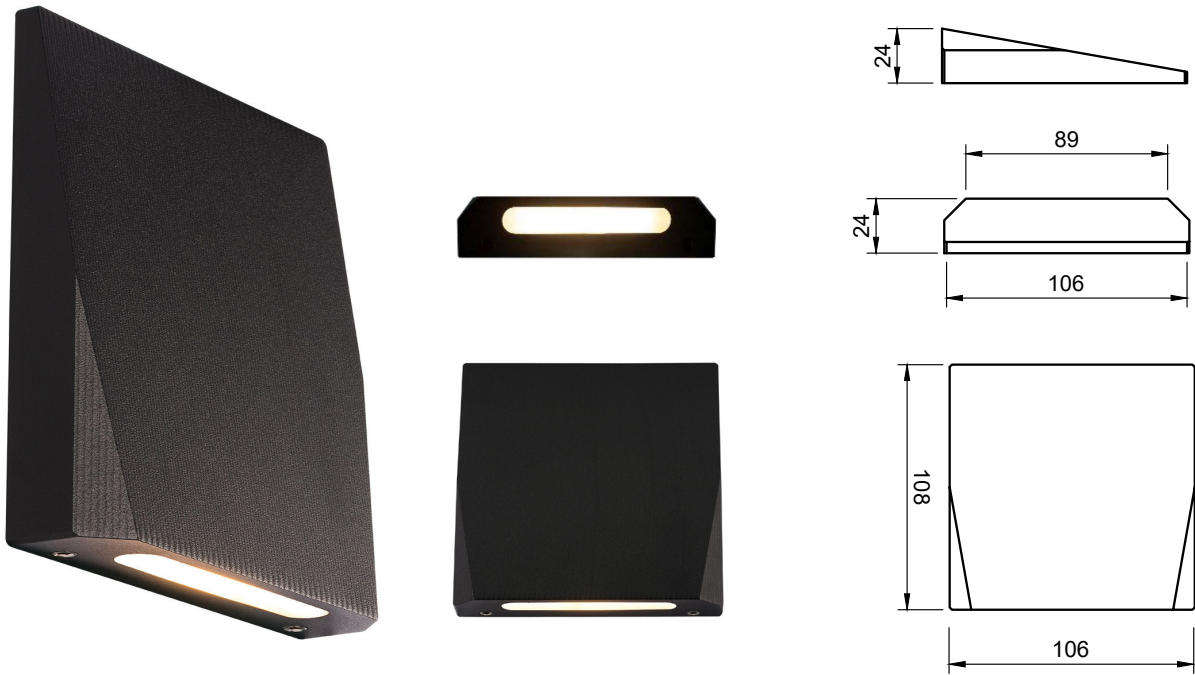

**Technical:**

LED TYPE	COLORS D6240 or CUTTER CLL104	CONTROL GEAR	REMOTE
RATED POWER	1W or 4W	DIMMING PROTOCOL	DALI - 0-10V - PHASE DIM - ON/OFF
CRI	80	CABLE LENGTH	500MM STANDARD LENGTH
BEAM ANGLES	NOMINATED IN TABLE BELOW	MOUNTING OPTIONS	SURFACE WALL
INPUT POWER / FORWARD VOLTAGE	24V CONSTANT VOLTAGE	WEIGHT	0.4KG
NOMINAL LUMENS	38lm or 268lm	HARDWARE	FROSTED ACRYLIC DIFFUSER
IP RATING	IP54	CONSTRUCTION	MACHINED METAL & HEATSINK
COLOUR TEMPERATURE	2700K - 3000K - 4000K	WARRANTY	2 YEARS

**Product Generator:** example 1517-PB-D-30-W-1W-DALI-N/A

Model	Finish	Beam Angle	CCT	Mounting	Wattage	Dimming	Accessory
NL1517	PB Black	D Diffused	27 2700K	W Wall Mounted	1W / 24V	DALI	N/A
	PW White		30 3000K		4W / 24V	0-10V	
			40 4000K			Phase	
						On/Off	

NL1517	-		-		-		-	
--------	---	--	---	--	---	--	---	--