


KOWARI WALL

Data Sheet

Description:

An Australian manufactured luminaire coupled with a locally produced LED engine; the Kowari Wall offers an aged brass or powder coated finish augmented by a selection of shades designed to enhance the luminaires unique display environment.

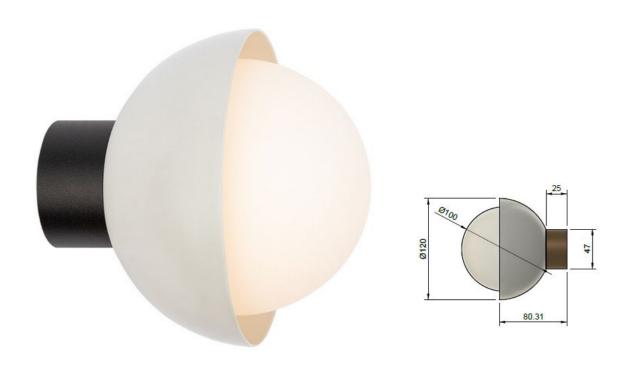

Technical:

LED type	Cree XHP-50-2	Control gear	Remote	
Rated power	4w, 6w	Dimming protocols	Dali, 0-10V, Phase Dim, On/Off	
CRI	80	Cable length	300 mm	
Beam angles	Diffused	Mounting options	Surface	
Input power	350mA – 700mA	Weight	2 kg	
Nominal lumens	300lm or 476lm	Hardware	Covert Mounting System	
IP rating	IP20	Construction	Machined metal, glass shade	
Colour temperature	2700K - 3000K - 4000K	Warranty	Two years	

Product Generator: Example NL-1332CC-AB-SF-30-SM-4W-4-N/A

Model	Finish	Shade	ССТ	Mounting	Wattage	Dimming	Accessories
NL-1332CC	AB Aged brass	SF Surf mist	27 2700K	SM Surface	4w/350mA	1 Dali	N/A
	BR Brushed brass	PB Black texture	30 3000K		6w/700mA	2 0-10V	
	PB Black	PW White texture	40 4000K			3 Phase	
	PW White	CC Custom				4 On/Off	
	CC Custom						

Order Code

NL-1332CC	SM		N/A
-----------	----	--	-----