


Description:

Low Profile Surface mounted Direct Wall Light, 1W or 4W, Various CCT, IP54, finished in machined 6061 Aluminium (Powdercoated White, Black or Dark Bronze), UV stabilized frosted Acrylic diffuser, pre-fitted 500mm lead, 24V, 'Covert Mounting System'

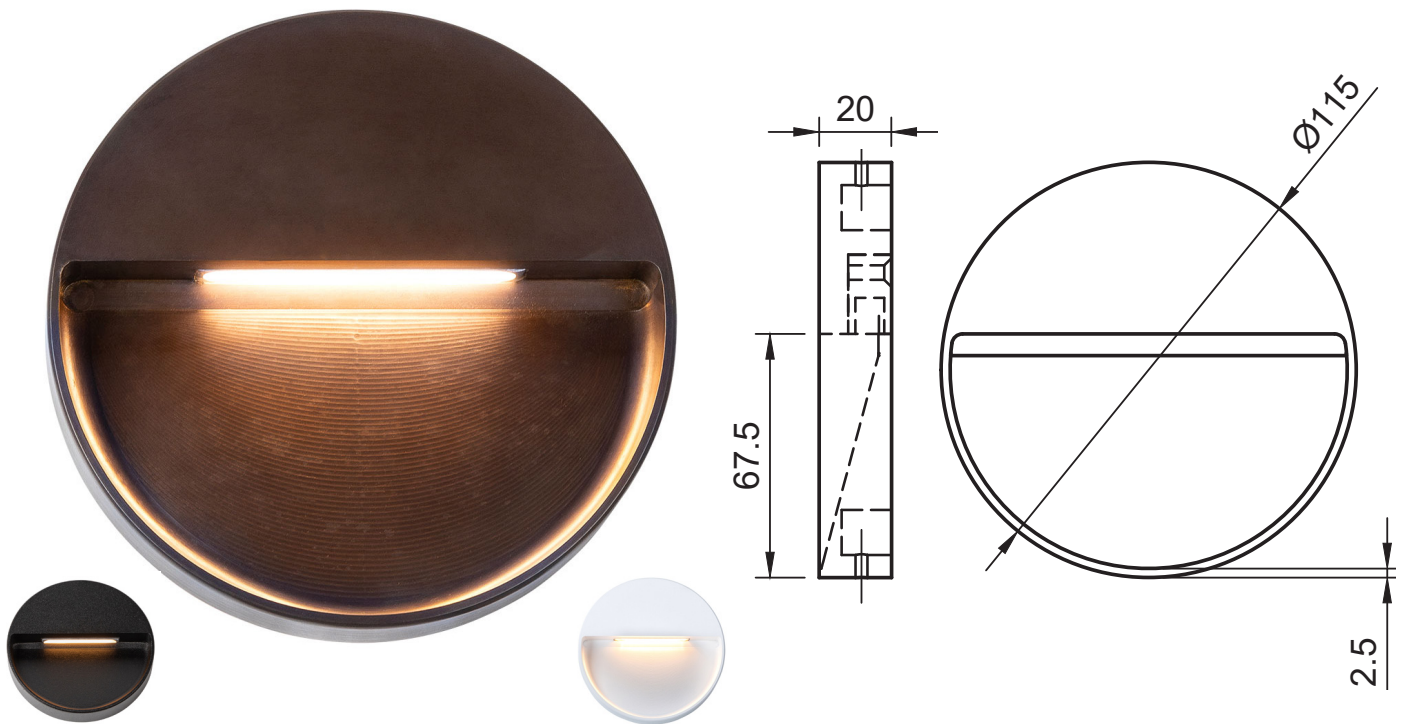

Technical:

| | | | |
|-------------------------------|-------------------------------|------------------|-----------------------------------|
| LED TYPE | COLORS D6240 or CUTTER CLL104 | CONTROL GEAR | REMOTE |
| RATED POWER | 1W or 4W | DIMMING PROTOCOL | DALI - 0-10V - PHASE DIM - ON/OFF |
| CRI | 80 | CABLE LENGTH | 500MM STANDARD LENGTH |
| BEAM ANGLES | NOMINATED IN TABLE BELOW | MOUNTING OPTIONS | SURFACE WALL |
| INPUT POWER / FORWARD VOLTAGE | 24V CONSTANT VOLTAGE | WEIGHT | 0.4KG |
| NOMINAL LUMENS | 38lm or 268lm | HARDWARE | COVERT MOUNTING SYSTEM |
| IP RATING | IP54 | CONSTRUCTION | MACHINED ALUMINIUM / BRASS |
| COLOUR TEMPERATURE | 2700K - 3000K - 4000K | WARRANTY | 2 YEARS |

Product Generator: example 3110-PB-D-30-W-1W-DALI-N/A

| Model | Finish | Beam Angle | CCT | Mounting | Wattage | Dimming | Accessory |
|--------|---------------|------------|----------|----------------|----------|---------|-----------|
| NL3110 | PB Black | D Diffused | 27 2700K | W Wall Mounted | 1W / 24V | DALI | N/A |
| | PW White | | 30 3000K | | 4W / 24V | 0-10V | |
| | AB Aged Brass | | 40 4000K | | | Phase | |
| | | | | | | On/Off | |
| | | | | | | | |
| | | | | | | | |

| | | | | | | | |
|--------|---|---|---|---|---|---|---|
| NL3110 | - | - | - | - | - | - | - |
|--------|---|---|---|---|---|---|---|