


**Description:**

Recessed miniature downlight, ideal for recessing or surface mounting in shallow depths. 1Watt CREE XLAMP XP-G3, various colour temperatures and finishes available. Machined solid brass or Machined Aluminium 6061 body, Borosilicate Glass Lens, accessories available. Resin Sealed Cable Gland, Stainless Steel hinge Screws, pre-fitted Double insulated exterior rated cable.

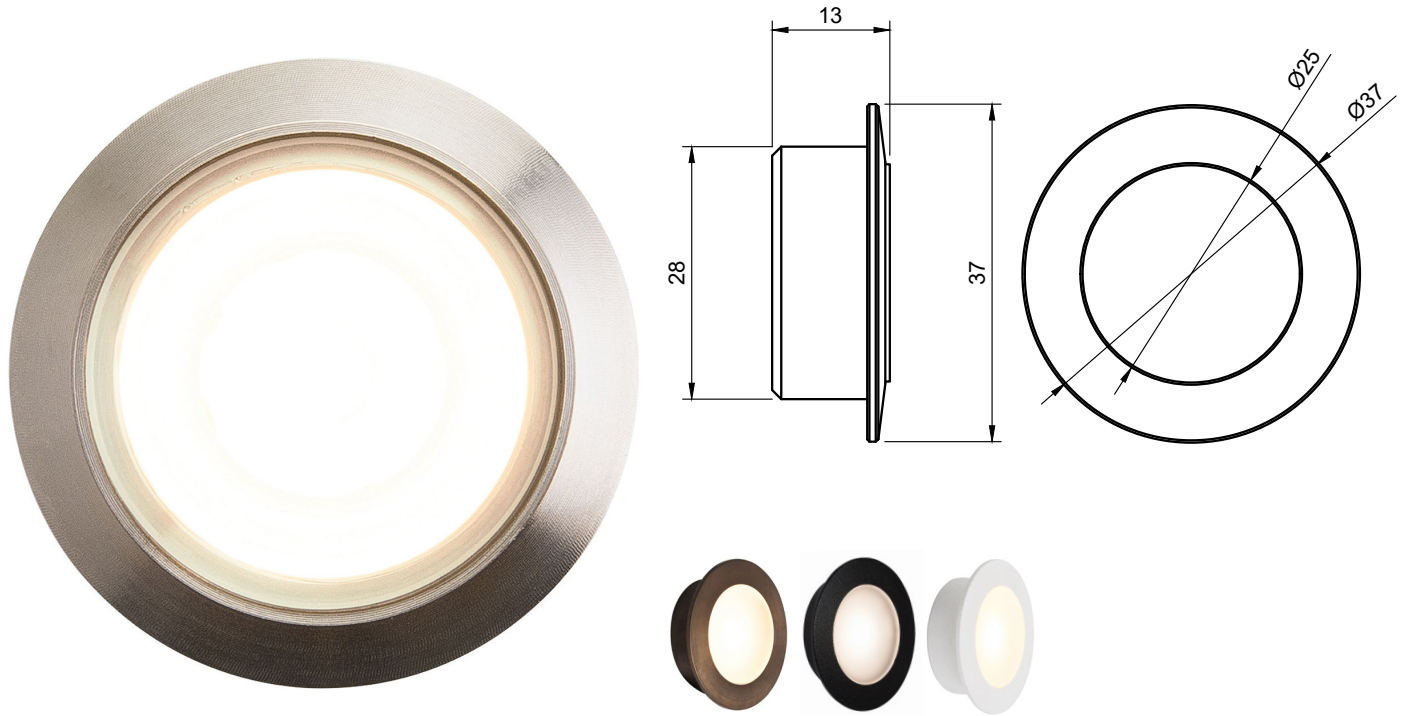

**Technical:**

|                               |                          |                  |                                   |
|-------------------------------|--------------------------|------------------|-----------------------------------|
| LED TYPE                      | CREE XLAMP XP-G3         | CONTROL GEAR     | REMOTE                            |
| RATED POWER                   | 1W                       | DIMMING PROTOCOL | DALI - 0-10V - PHASE DIM - ON/OFF |
| CRI                           | 80                       | CABLE LENGTH     | 500MM STANDARD LENGTH             |
| BEAM ANGLES                   | NOMINATED IN TABLE BELOW | MOUNTING OPTIONS | RECESSED                          |
| INPUT POWER / FORWARD VOLTAGE | 350mA / 2.73V            | WEIGHT           | 0.2KG                             |
| NOMINAL LUMENS                | 155lm                    | HARDWARE         | GLASS LENS, O-RING, GLAND, CABLE  |
| IP RATING                     | IP40                     | CONSTRUCTION     | MACHINED METAL & HEATSINK         |
| COLOUR TEMPERATURE            | 2700K - 3000K - 4000K    | WARRANTY         | 2 YEARS                           |

**Product Generator:** example 9910CC-AB-D-30-R-1W-DALI

| Model    | Finish             | Beam Angle | CCT      | Mounting         | Wattage    | Dimming | Accessory |
|----------|--------------------|------------|----------|------------------|------------|---------|-----------|
| NL9910CC | AB Aged Brass      | D Diffused | 27 2700K | R Recessed       | 1W / 350mA | DALI    | N/A       |
|          | BR Brushed Brass   |            | 30 3000K | SM Surface Mount |            | 0-10V   |           |
|          | SS Stainless Steel |            | 40 4000K |                  |            | Phase   |           |
|          | PB Black           |            |          |                  |            | On/Off  |           |
|          | PW White           |            |          |                  |            |         |           |
|          | CC Custom          |            |          |                  |            |         |           |

|        |   |   |   |   |   |   |   |
|--------|---|---|---|---|---|---|---|
| NL9910 | - | - | - | - | - | - | - |
|--------|---|---|---|---|---|---|---|